

STAMFORD®

S1L2-N1 Winding 311 / 711

S1L2-N1 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited / Aux winding
Voltage Regulation	± 1%
No Load Excitation Voltage (V)	18 V
Full Load Excitation Voltage (V)	47 V

STAMFORD®

S1L2-N1 Winding 311 / 711

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Concentric							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311 / 711							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others							
Waveform Distortion	NO LOAD < 2% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	8.0							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Voltage Series Star	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage Parallel Star	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage Series Delta	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
kVA Base Rating (Class H)	41.2	45	45	N/A	47.5	50.4	N/A	54
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	1.987	1.959	1.820		1.912	1.813		1.633
X'd Dir. Axis Transient	0.120	0.118	0.110		0.116	0.110		0.099
X''d Dir. Axis Subtransient	0.131	0.129	0.120		0.126	0.120		0.108
Xq Quad. Axis Reactance	1.096	1.081	1.004		1.055	1.000		0.901
X''q Quad. Axis Subtransient	0.144	0.142	0.132		0.139	0.132		0.118
XL Stator Leakage Reactance	0.071	0.070	0.065		0.068	0.065		0.058
X2 Negative Sequence Reactance	0.191	0.188	0.175		0.184	0.174		0.157
X0 Zero Sequence Reactance	0.041	0.041	0.038		0.040	0.038		0.034
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.556	2.519	2.341		2.459	2.332		2.099
X'd Dir. Axis Transient	0.138	0.136	0.127		0.133	0.126		0.113
X''d Dir. Axis Subtransient	0.153	0.151	0.140		0.147	0.140		0.126
Xq Quad. Axis Reactance	1.129	1.113	1.034		1.086	1.030		0.928
X''q Quad. Axis Subtransient	0.173	0.171	0.158		0.166	0.158		0.142
XL Stator Leakage Reactance	0.080	0.079	0.073		0.077	0.073		0.066
X2 Negative Sequence Reactance	0.229	0.226	0.210		0.221	0.209		0.188
X0 Zero Sequence Reactance	0.049	0.048	0.044		0.047	0.044		0.040
Time Constants (Seconds)								
T'd TRANSIENT TIME CONST.	0.026							
T''d SUB-TRANSTIME CONST.	0.003							
T'do O.C. FIELD TIME CONST.	0.172							
Ta ARMATURE TIME CONST.	0.008							



STAMFORD®

S1L2-N1 Winding 311 / 711

Resistances in Ohms (Ω) at 22°C	
Stator Winding Resistance (R_a)	0.135 Ω per phase series star connected
Rotor Winding Resistance (R_f)	1.06 Ω
Exciter Stator Winding Resistance	14.4 Ω
Exciter Rotor Winding Resistance	0.207 Ω per phase
Positive Sequence Resistance (R_1)	0.169 Ω
Negative Sequence Resistance (R_2)	0.194 Ω
Zero Sequence Resistance (R_0)	0.169 Ω
Aux Winding Resistance (with winding 711 only)	3.9 Ω
Mechanical data	
Cooling Air	0.176 m ³ /sec (50Hz) 0.211 m ³ /sec (60Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.
Bearing	Single Bearing
Weight Complete Alternator	193.79 kg
Weight Wound Stator	83.56 kg
Weight Wound Rotor	73.46 kg
Moment of Inertia	0.3314 kgm ²
Shipping weight in a Crate	240 kg
Packing Crate Size	1050X570X960 mm
Maximum Over Speed	2250 RPM for two minutes
Bearing Drive End	N/A
Bearing Non-Drive End	Ball Bearing, 6306-2RS1









STAMFORD®

S1L2-N1 Winding 311 / 711

Three Phase Efficiency Curves

50Hz Curves

60Hz Curves

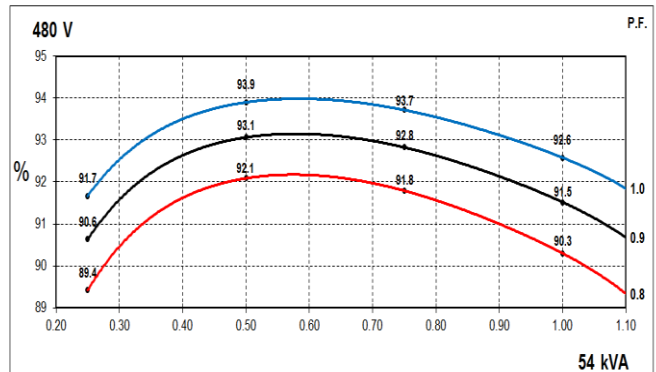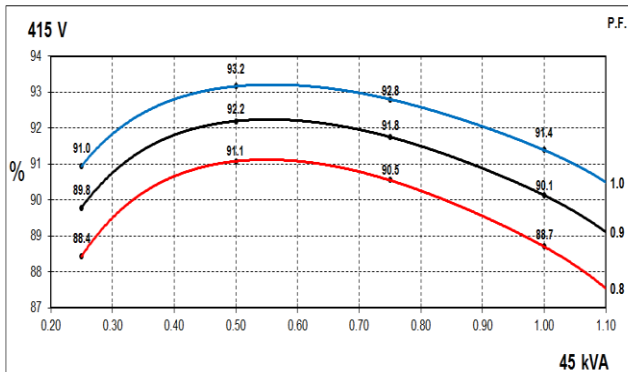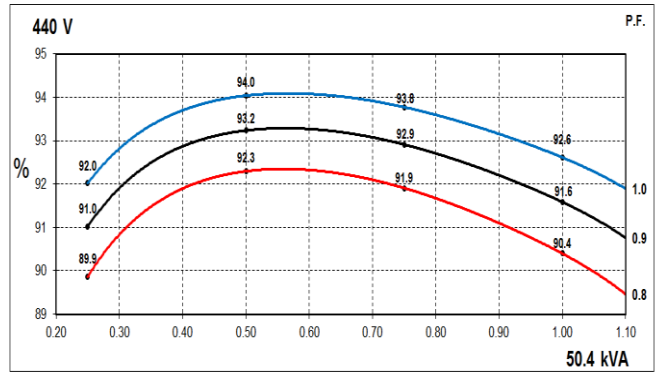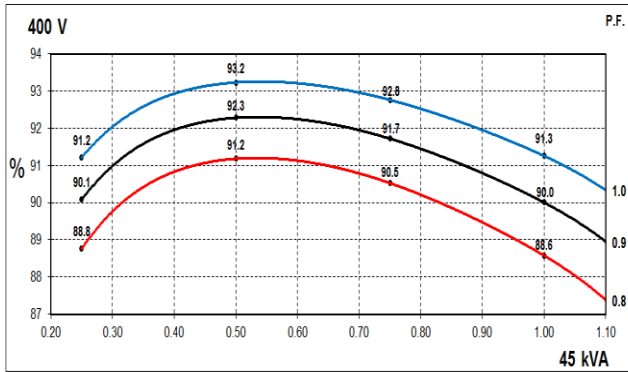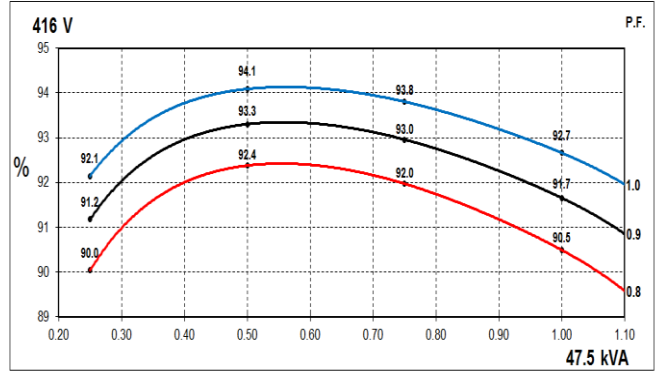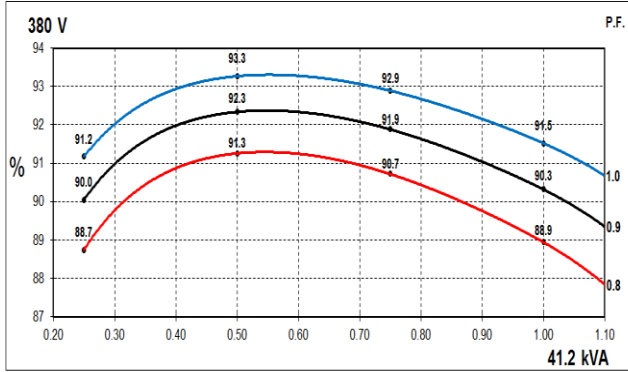


STAMFORD


S1L2-N1 Winding 311 / 711

Locked Rotor Motor Starting Curves

50Hz

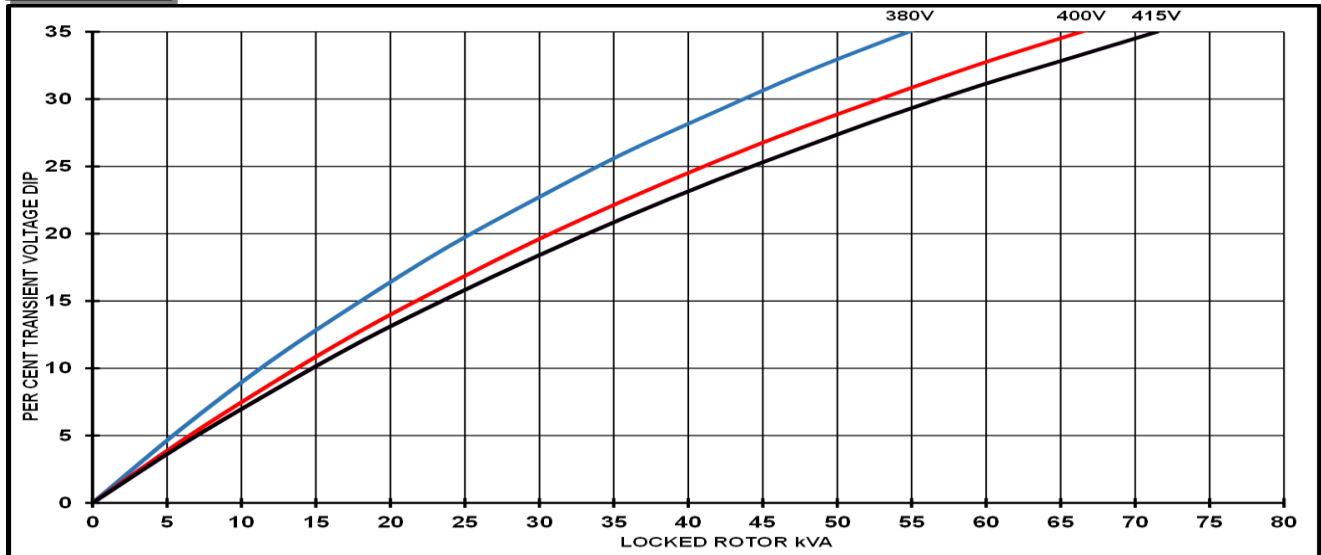

60Hz

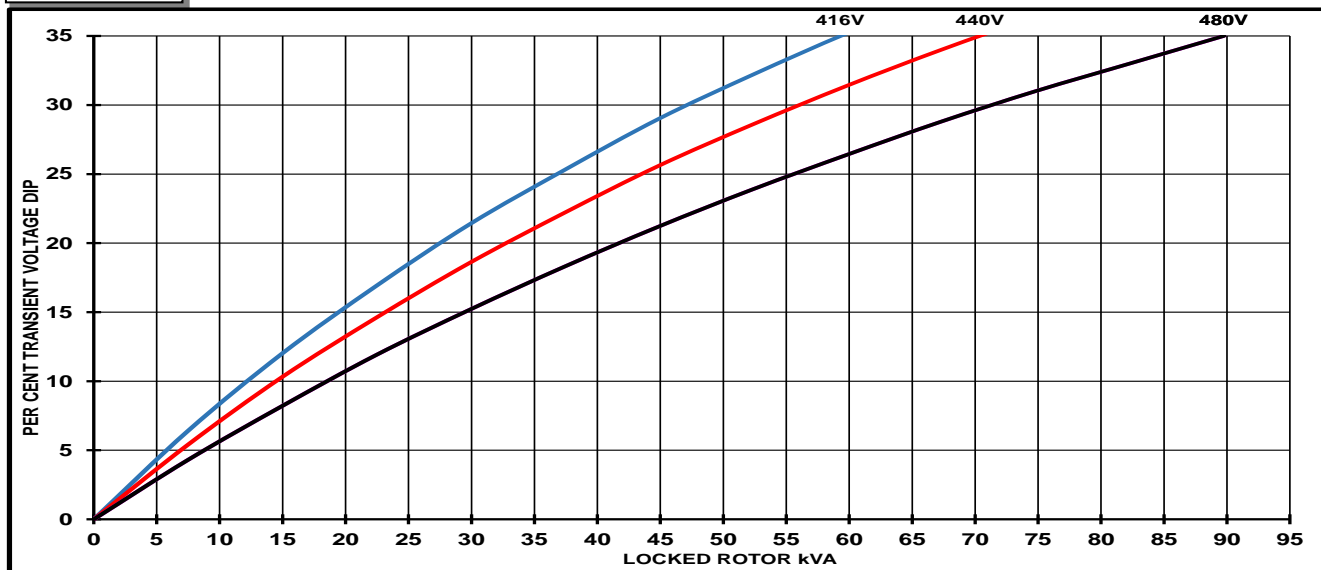

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1.00	
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	


STAMFORD

S1L2-N1 Winding 311 / 711

Three-phase Short Circuit Decrement Curve


**Note: Applicable only for Winding 711 (Auxiliary winding).
Winding 311 (no Auxiliary winding) will not provide short circuit capability.**

50Hz

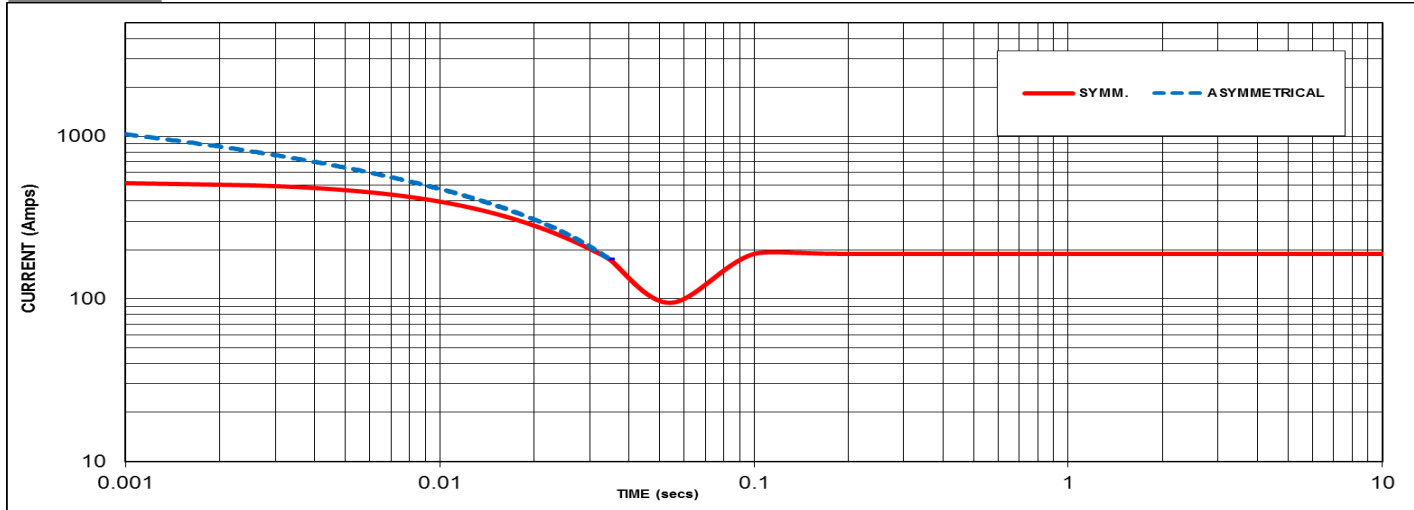

Sustained Short Circuit = 189 Amps

60Hz

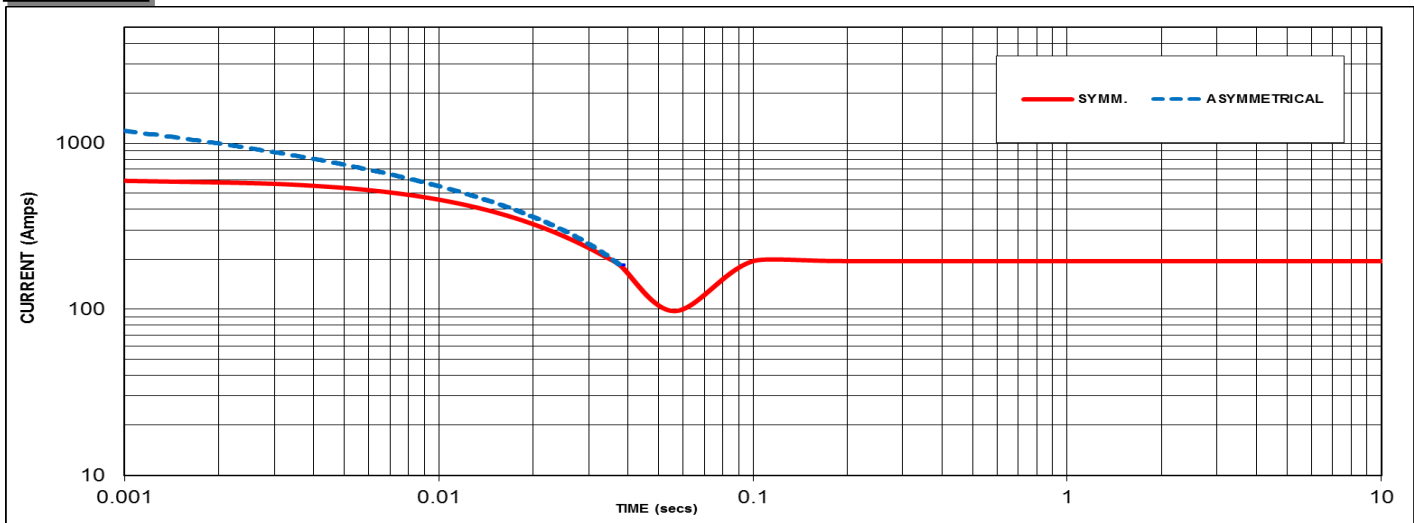

Sustained Short Circuit = 195 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	N/A	416V	X 1.00
400V	X 1.00	440V	X 1.06
415v	X 1.04	460V	N/A
440V	N/A	480V	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :
Parallel Star = Curve current value X 2
Series Delta = Curve current value X 1.732

STAMFORD


S1L2-N1 Winding 311 / 711

Typical Alternator Operating Charts

400V/50Hz

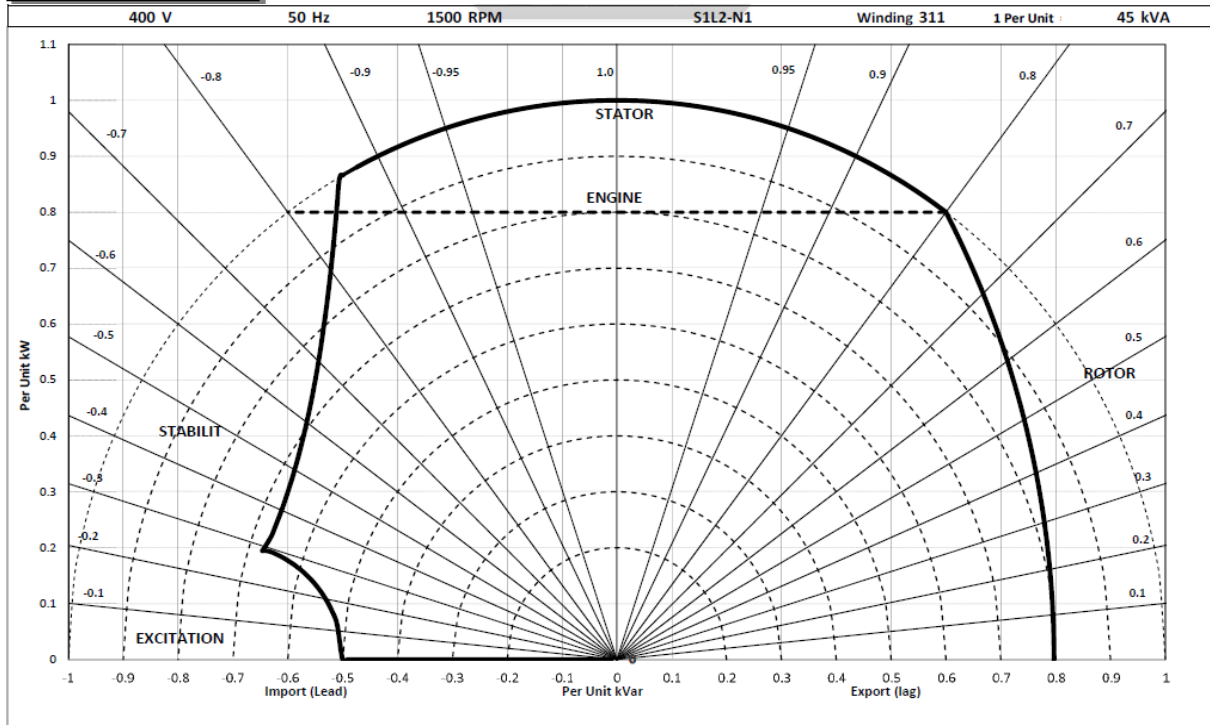

480V/60Hz

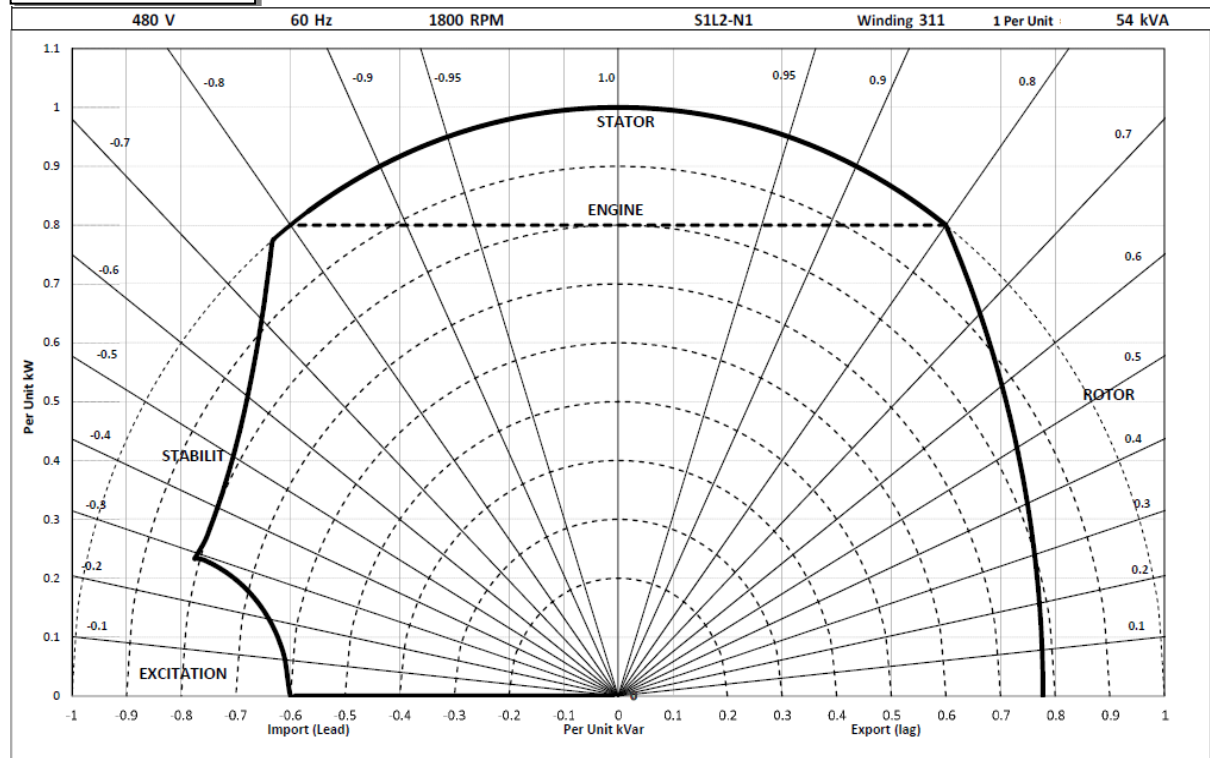



STAMFORD®

S1L2-N1 Winding 311 / 711

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	45.3	49.5	49.5	N/A	44.0	48.0	48.0	N/A	41.2	45.0	45.0	N/A	37.5	41.0	41.0	N/A
	kW	36.2	39.6	39.6	N/A	35.2	38.4	38.4	N/A	33.0	36.0	36.0	N/A	30.0	32.8	32.8	N/A
	Efficiency (%)	87.9	87.3	87.5	N/A	88.2	87.8	87.9	N/A	88.9	88.6	88.7	N/A	89.7	89.4	89.5	N/A
	kW Input	41.3	45.3	45.2	N/A	39.9	43.7	43.7	N/A	37.1	40.6	40.6	N/A	33.5	36.7	36.7	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	52.3	55.4	N/A	59.4	50.8	53.9	N/A	57.6	47.2	50.4	N/A	54.0	43.2	45.8	N/A	49.1
	kW	41.8	44.3	N/A	47.5	40.6	43.1	N/A	46.1	37.8	40.3	N/A	43.2	34.6	36.6	N/A	39.3
	Efficiency (%)	89.6	89.5	N/A	89.3	89.9	89.8	N/A	89.7	90.5	90.4	N/A	90.3	91.1	91.0	N/A	90.9
	kW Input	46.7	49.5	N/A	53.2	45.2	48.0	N/A	51.4	41.7	44.6	N/A	47.8	37.9	40.3	N/A	43.2

Greenpower AB
 Helsingborgsvägen Varalöv,
 262 96 Ängelholm, Sweden
 Phone: +46 43122240
 Email: info@greenpower.se
 Web: www.greenpower.se