
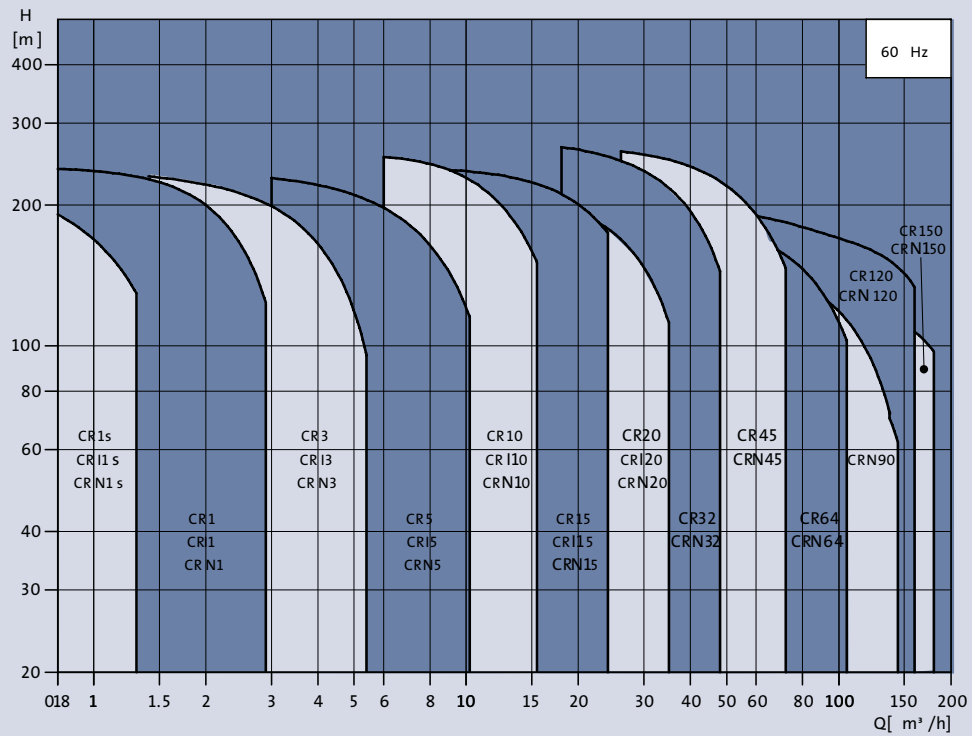


## CR Performance Range

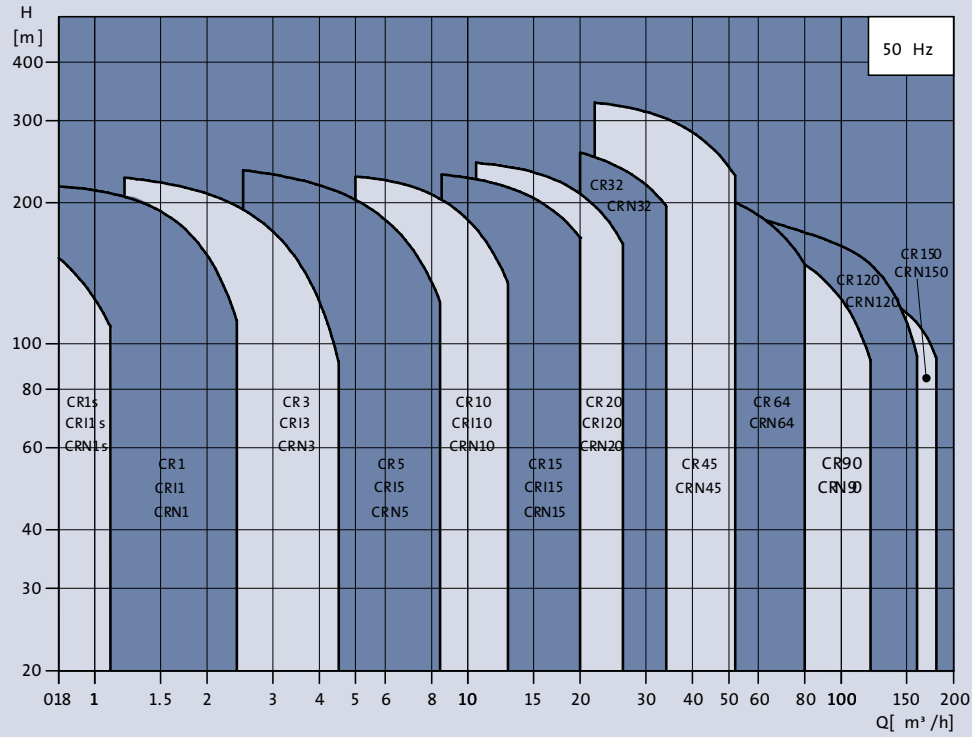

# BEVATTNINGSTEKNIK

www.bevattningsteknik.se Tel:0431-222 90

	CR 1s	CR 1	CR 3	CR 5	CR 10	CR 15	CR 20	CR 32	CR 45	CR 64	CR 90	CR 120	CR 150
<b>Range:</b>													
<b>Temperature range (°C)</b>	-20 to +120							-30 to +120					
<b>On request (°C)</b>	-40 to +180							-40 to +180					
<b>Max. pump efficiency (%)</b>	35	48	58	66	70	72	73	78	79	80	81	75	72
<b>Flow range (m³/h)</b>	0.3-1.1	0.7-2.4	1.2-4.5	2.5-8.5	5-13	9-24	11-29	15-40	22-58	30-85	45-120	60-160	75-180
<b>Version:</b>													
<b>CR (AISI 304/Cast Iron)</b>	x	x	x	x	x	x	x	x	x	x	x	x	x
<b>CRI (AISI 304)</b>	x	x	x	x	x	x	x						
<b>CRN (AISI 316)</b>	x	x	x	x	x	x	x	x	x	x	x	x	x
<b>CRT (Titanium)</b>		x*	x*	x*	x*	x*							
<b>CR pipe connection:</b>													
<b>Oval flange (BSP)</b>	Rp 1	Rp 1	Rp 1	Rp 1½	Rp 1½	Rp 2	Rp 2½						
<b>On request (BSP)</b>	Rp 1½	Rp 1½	Rp 1½	Rp 1	Rp 1½ Rp 2	Rp 2½	Rp 2						
<b>Flange</b>	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125
<b>On request</b>					DN 50	DN 65	DN 65	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150
<b>CRI pipe connection:</b>													
<b>Oval flange (BSP)</b>	Rp 1	Rp 1	Rp 1½	Rp 1½	Rp 1½	Rp 2	Rp 2						
<b>On request (BSP)</b>	Rp 1½	Rp 1½	Rp 1	Rp 1	Rp 2								
<b>Flange</b>	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50						
<b>On request</b>					DN 50	DN 65	DN 65						
<b>PJE coupling (Victaulic)</b>	Rp 1½ DN 32	Rp 1½ DN 32	Rp 1½ DN 32	Rp 1½ DN 32	Rp 2 DN 50	Rp 2 DN 50	Rp 2 DN 50						
<b>Clamp coupling (L-coupling)</b>	Ø48.3	Ø48.3	Ø48.3	Ø48.3	Ø60.3	Ø60.3	Ø60.3						
<b>Union (+GF+)</b>	Rp 2	Rp 2	Rp 2	Rp 2	Rp 2½	Rp 2½	Rp 2½						
<b>CRN pipe connections:</b>													
<b>Flange</b>	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125
<b>On request</b>					DN 50	DN 65	DN 65	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150
<b>PJE coupling (Victaulic)</b>	Rp 1½ DN 32	Rp 1½ DN 32	Rp 1½ DN 32	Rp 1½ DN 32	Rp 2 DN 50	Rp 2 DN 50	Rp 2 DN 50	Rp 3	Rp 4	Rp 4	Rp 5	Rp 5	Rp 5
<b>Clamp coupling</b>	x	x	x	x	x	x	x						
<b>Union (+GF+)</b>	x	x	x	x	x	x	x						
<b>CRT pipe connections:</b>													
<b>PJE coupling (Victaulic)</b>		x*	x*	x*	x*	x*							
<b>Flange (on request)</b>		x*	x*	x*	x*	x*							

\*CRT 2,4,8 and 16.